Navaid Energy Private Limited




Need help? Call: +91 9999492721

Polyethylene Skirt Keel Buoys 2600

Specifications of Buoys (Guide line only)

Specifications of Buoys (Guide Inic only)	
Buoy Diameter	2600mm
Body Thickness	18mm (Float Section)
Overall Height	6.5m
Focal Height	up to 5m
Draught	1.4m
Weight without Mooring	1200Kg (approx.)
Mooring Eyes	2N0s
Lifting Hook	2N0s
Super Structure	UV- Stabilized Polyethylene/ S.S Structure
Day-Mark (As per IALA)	Cardinal or Lateral Type
Recommended Chain	Dia-22 mm
Radar Reflector	Optional (NR30/NR160)
Blast Weight Adjustable	300Kg (approx.))

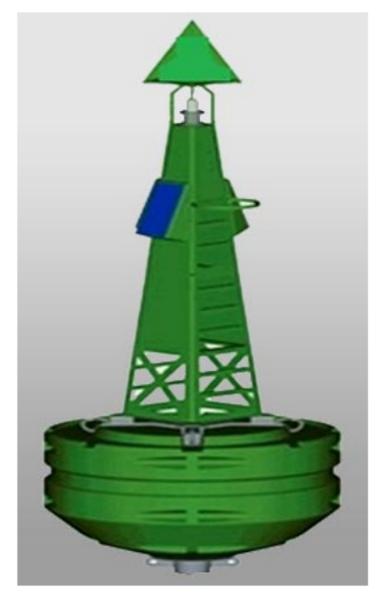

It is requested that the following particulars may please be furnished to enable us to make a proper study and offer advice in the matter.

- A Hydrographic chart/ Plan of the area in which the Buoys are proposed to be laid indicating the proposed location of the Buoys the depth of water etc.
- 2. The details of the current
- The nature of the holding ground / sea bottom at the various locations.
 - * Technical modification reserved without prior notice

Navaid Energy Private Limited